

MacroPix

MILANO - ITALIA

CRIUS-C



MacroPiX



Features

High definition, high brightness, high contrast, high stability

Product Advantages

Energy saving, environmental protection, long service life, low maintenance cost

Application Scenarios

It is used in shopping malls, supermarkets, hotels, restaurants, cinemas, airports, subways, etc.

MacroPiX

Hardware Parameters

size : 83" 、 70"

weight : 31Kg/27Kg

pixel pitch : 1.5mm/1.8mm/2.5mm



MacroPiX

HDMI OUT

HDMI IN

LAN

USB 3.0

AUDIO OUT

Signal input

**Multi-functional
interface**

Switch buttons


Power connector



MacroPiX

Screen Specifications

83/70 inch screen, standardized design

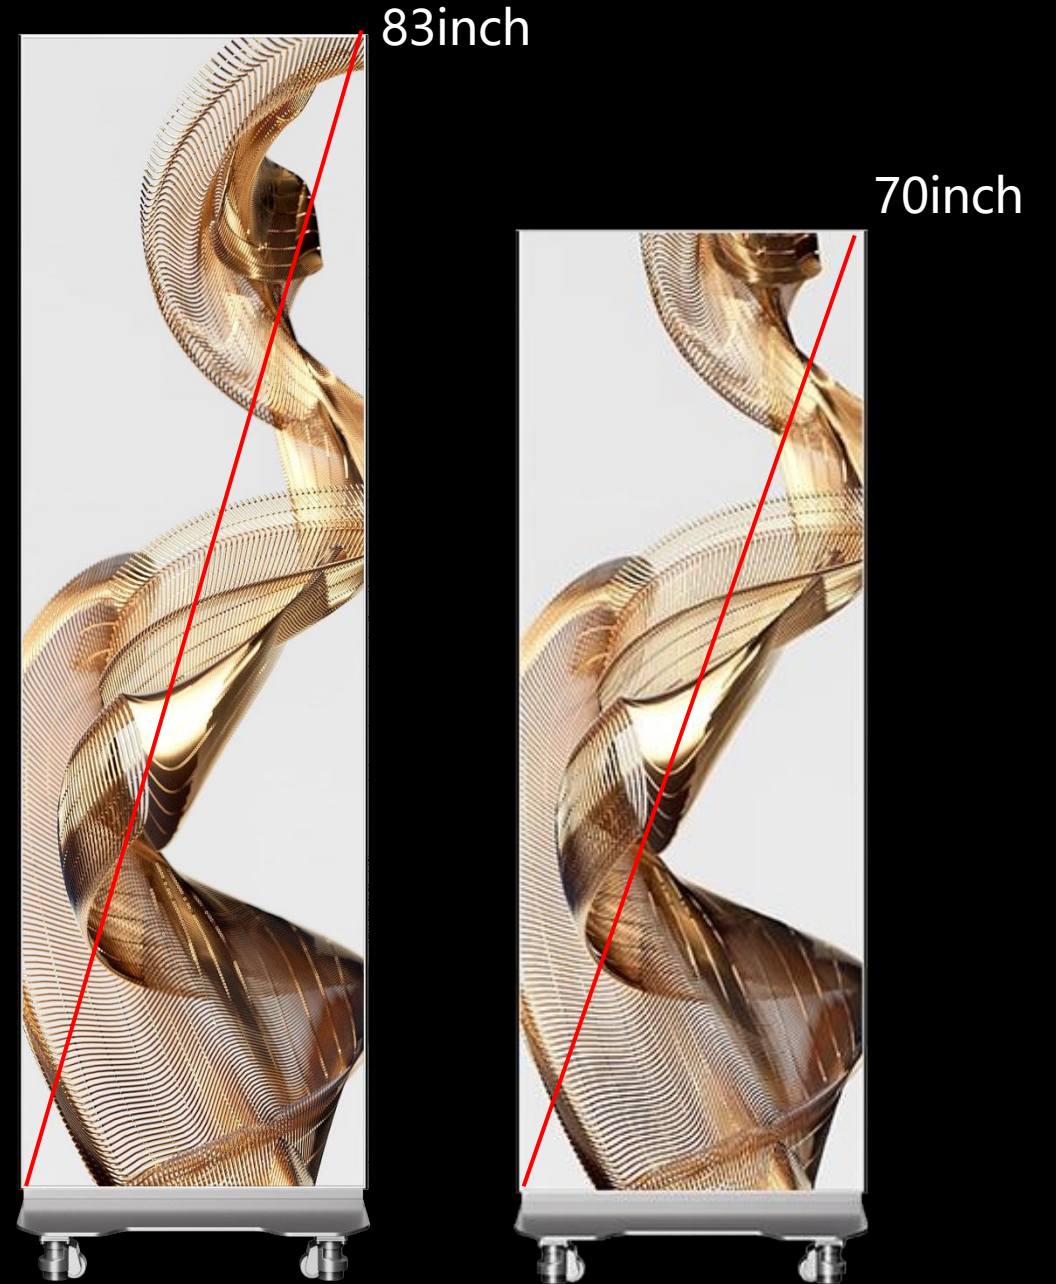

MacroPiX

Unique Back Cover

neat and clean design



MacroPiX




Rounded Design

The smooth rounded design
enhances the grip



Ultra-slim Design

The ultra-slim design ensures
maximum use of space

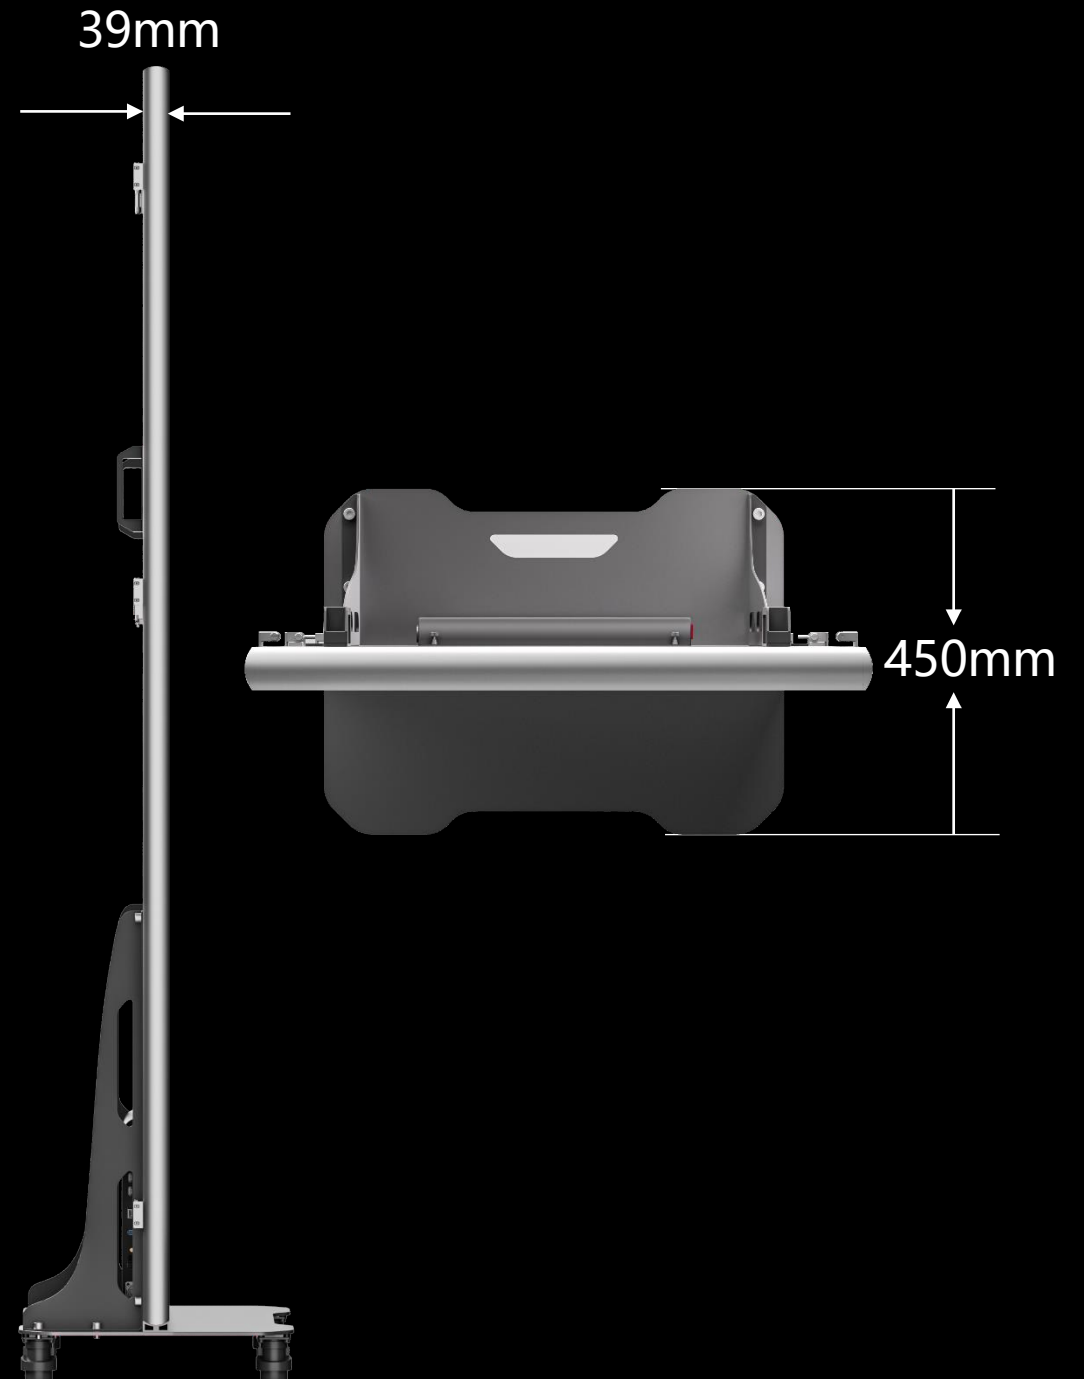

MacroPiX


Stable and Reliable

Stable, rounded feet enhance stability and reliability and reduce shaking.



Seamless Splicing

Equipped with self-locking hinges, the bezel is easy to flip and flexible.

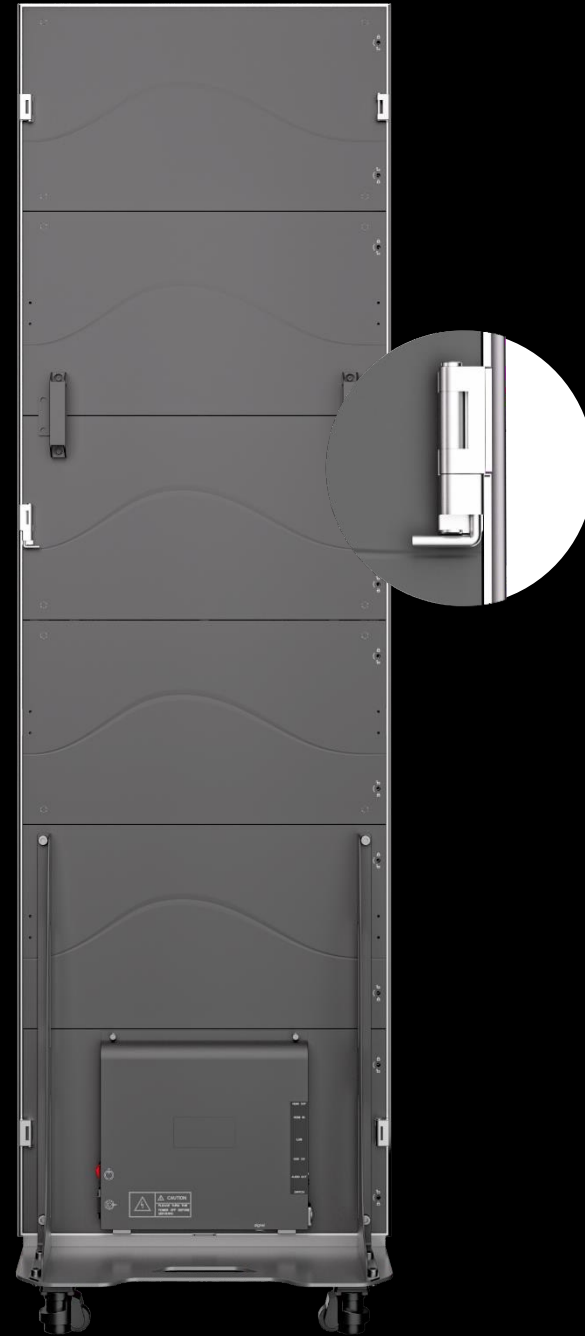

MacroPiX

HD Quality

Standard 2K resolution,
vivid colors, outstanding
contrast, delicate and
clear pictures



MacroPiX

Standard Splicing


The HDMI port of the screen body realizes 6 standard splicing



MacroPiX

Multiple Splicing

The use of aviation
plug network port can
realize the splicing of
multiple screens

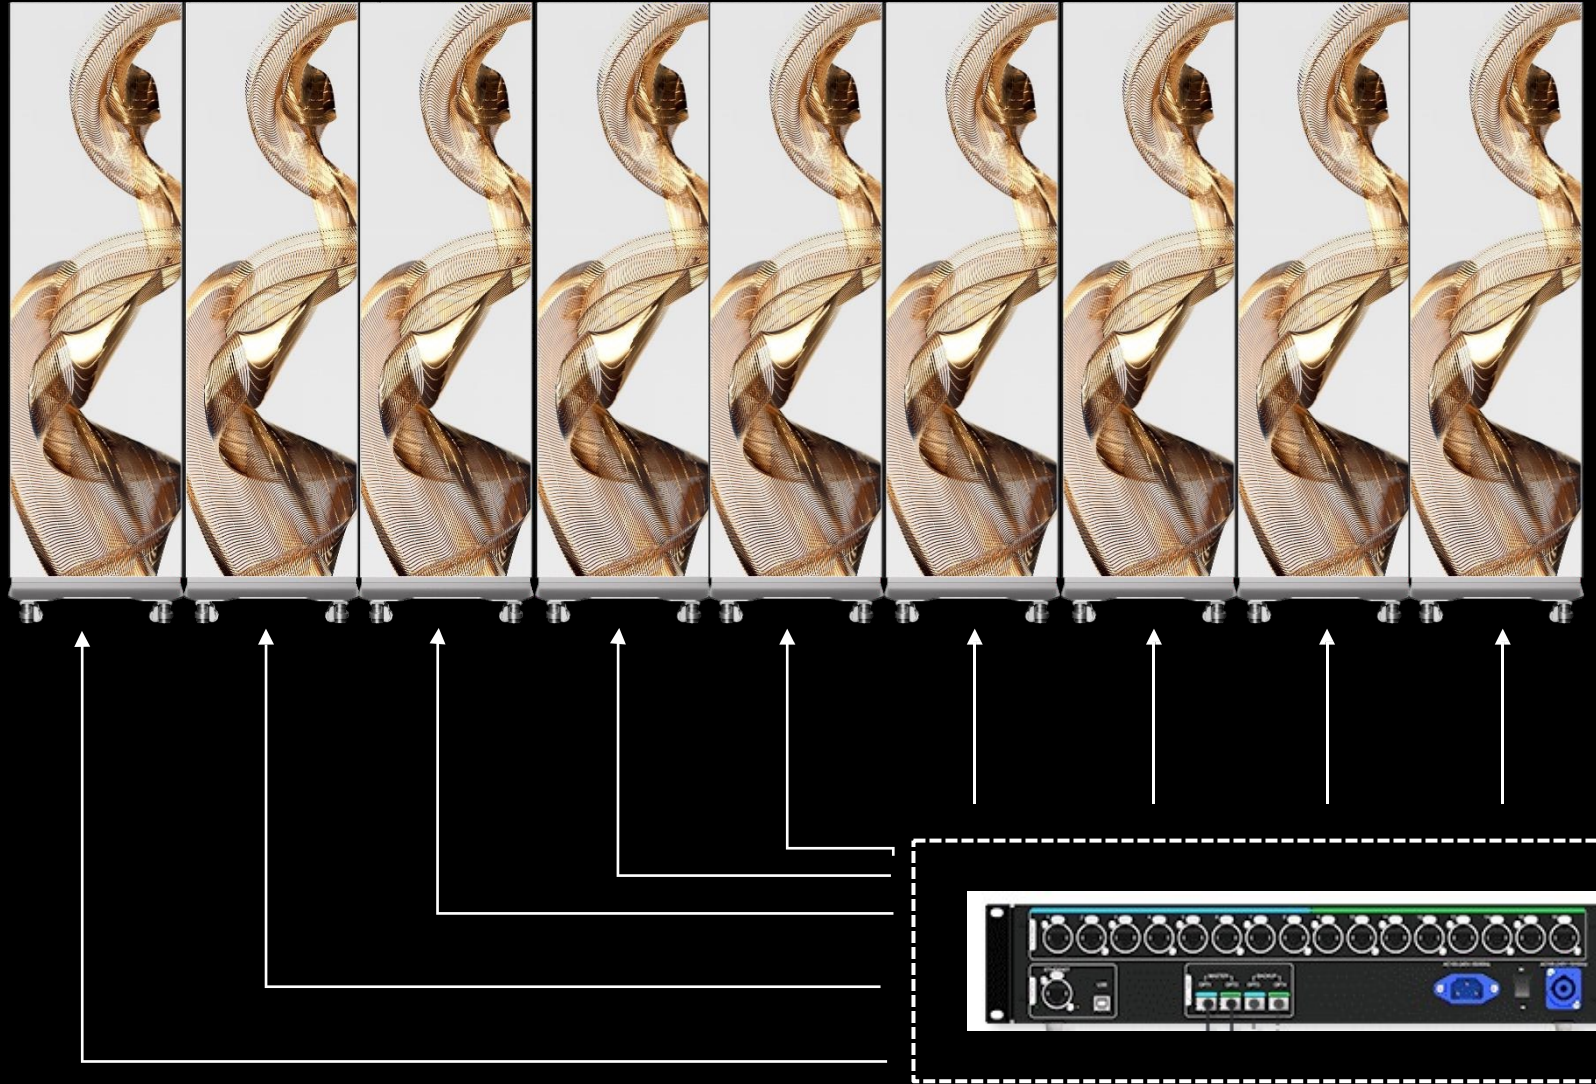

MacroPiX



handle

Superior load-bearing

The base is equipped with a Fuma wheel and a base handle design, which is labor-saving and convenient, and has excellent load-bearing performance



Foot Master
wheels

MacroPiX

01

System Compatibility

Compatibility with a wide range of Android apps and devices.

02

System Fluency

Optimize system resource management, run smoothly, and respond faster.

03

System Security

Strengthen system security, more comprehensive security protection, and ensure data security.



The pictures are all reference pictures, and all effects are subject to the actual installation

A variety of playback methods, more convenient operation

**Synchronous
playback**

**USB flash
drive playback**

**Asynchronous
Playback**

**Cluster cloud
playback**



HDMI input



**USB flash
drive input**




**Mobile phone
computer
Wireless control**



**LAN
playback**




**Cluster cloud
playback**

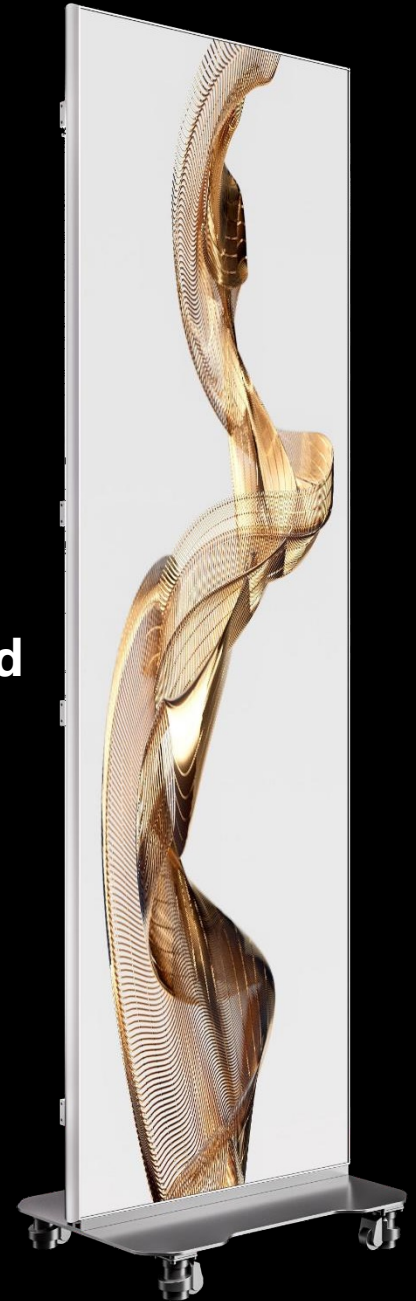


MacroPiX

Intelligent cloud cluster management
Take control of what's happening on the go

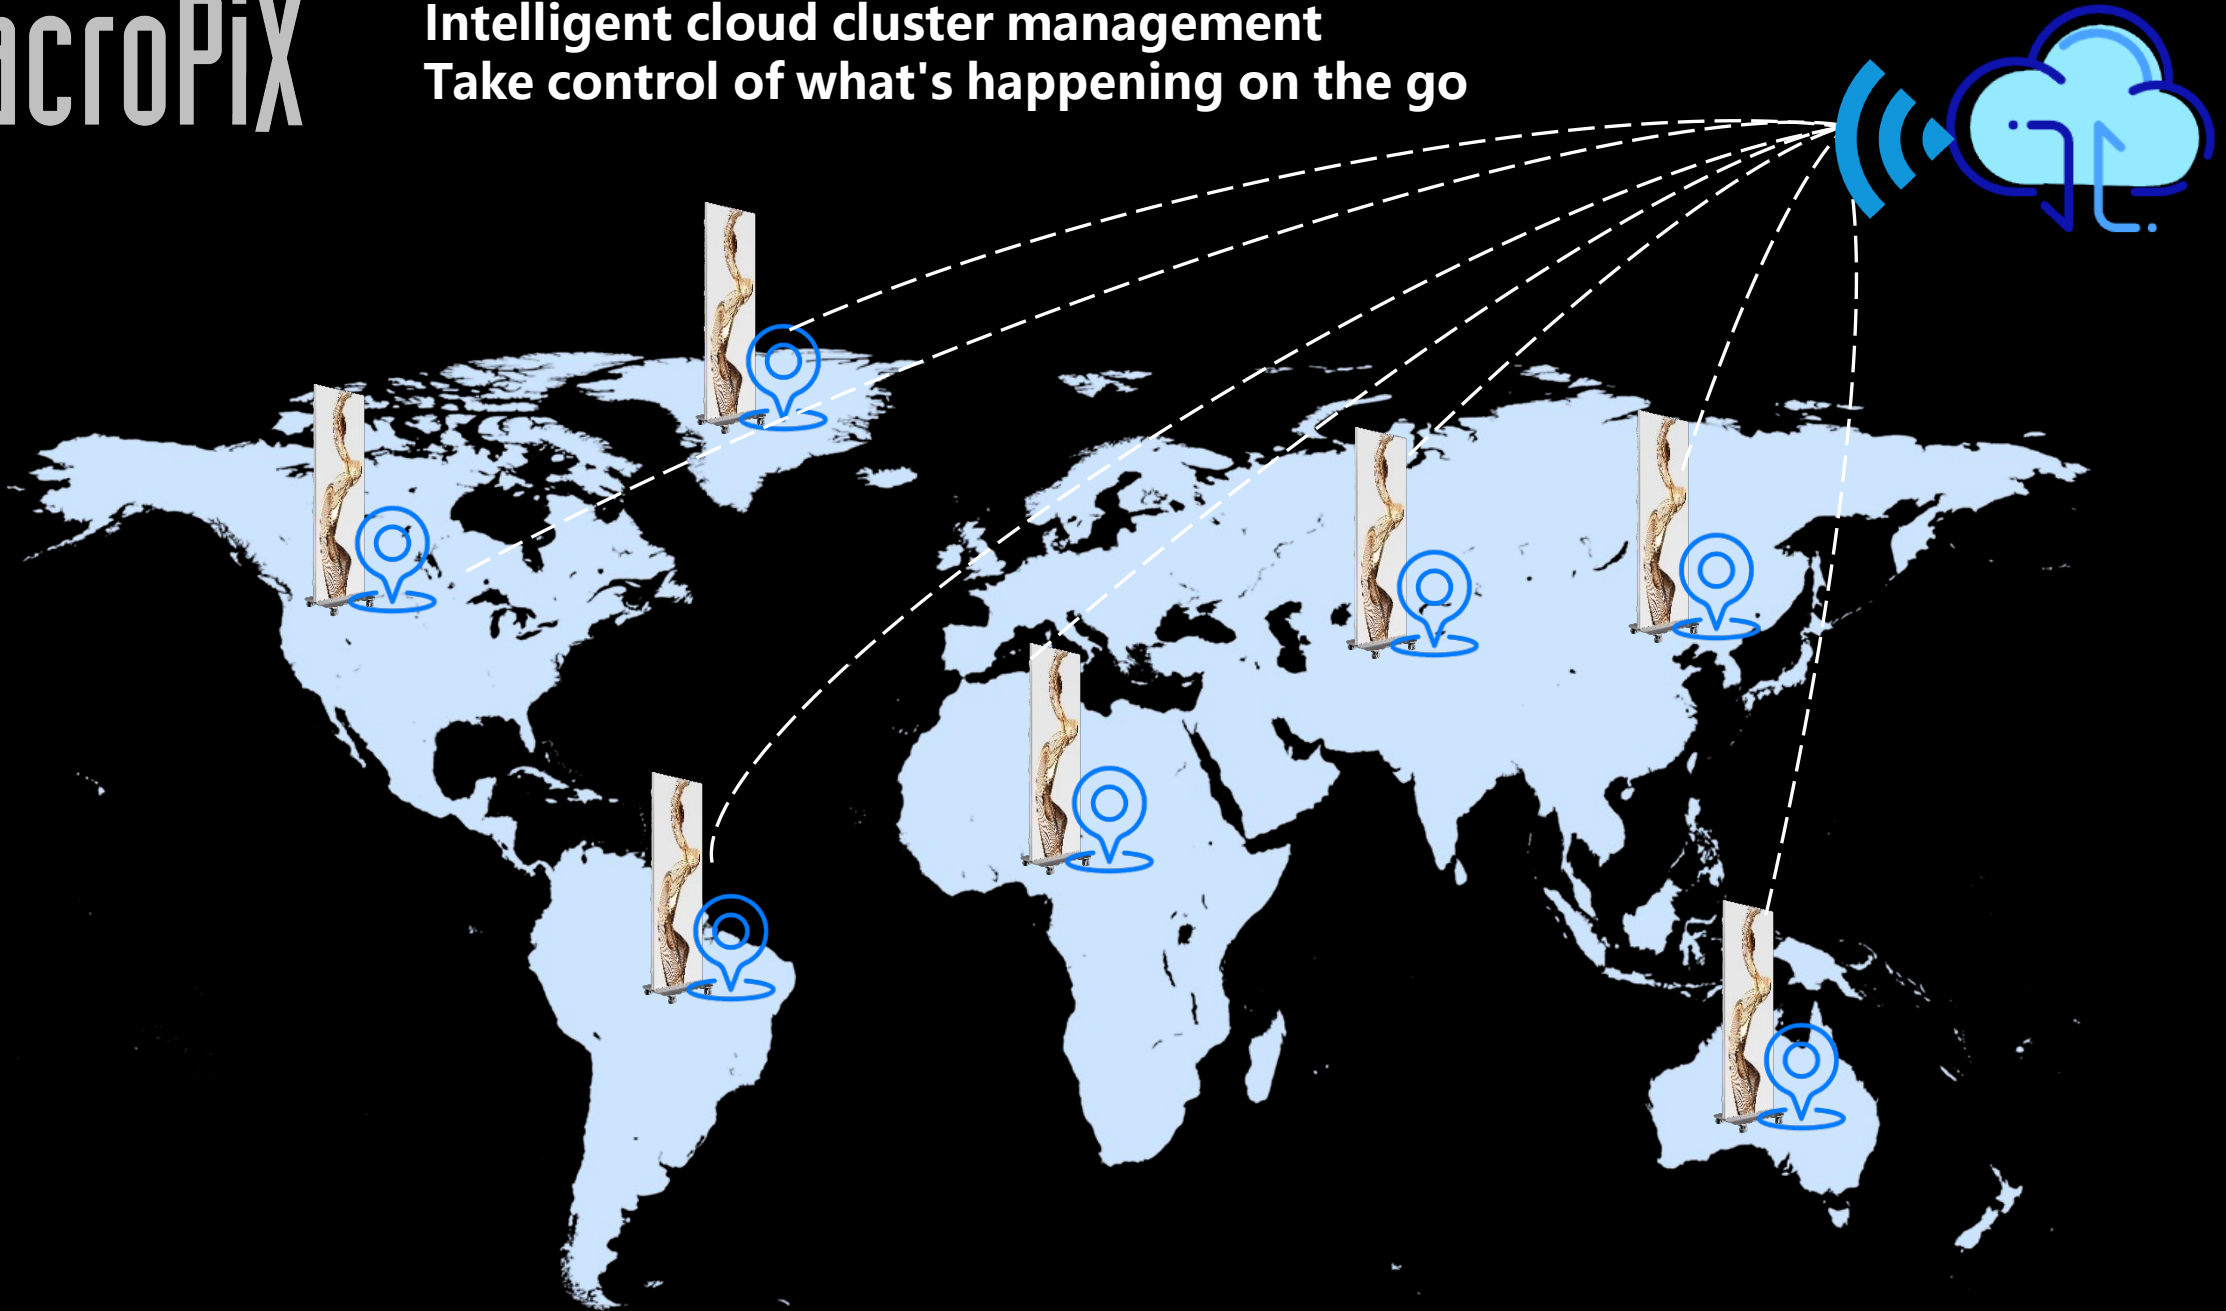

Intelligent cloud playback architecture

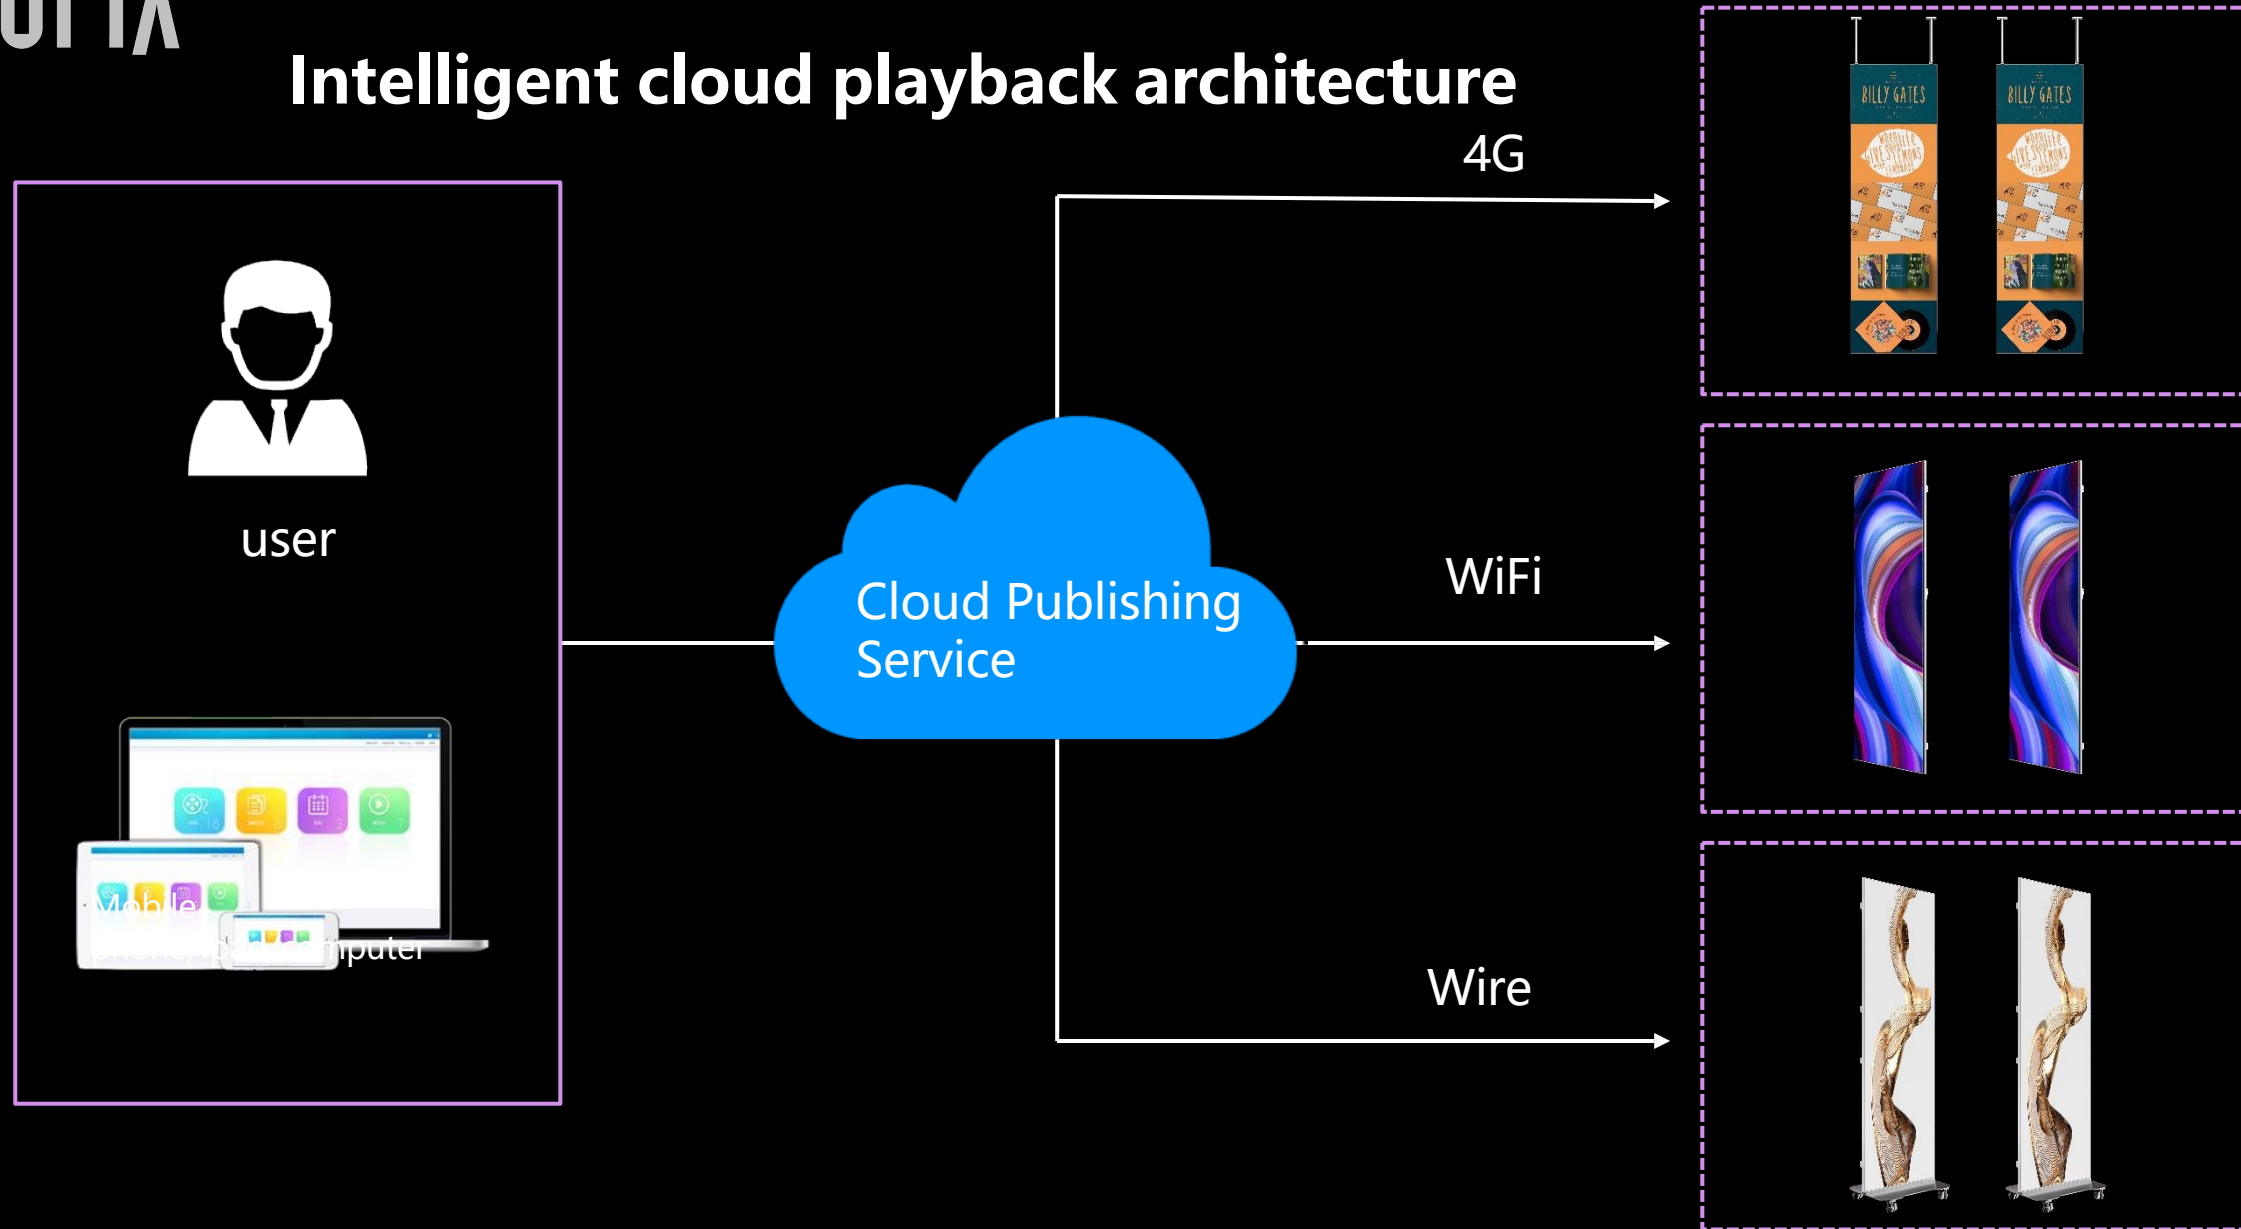


MacroPiX


Standard

Seat mounting

Support base mounting, easy to move

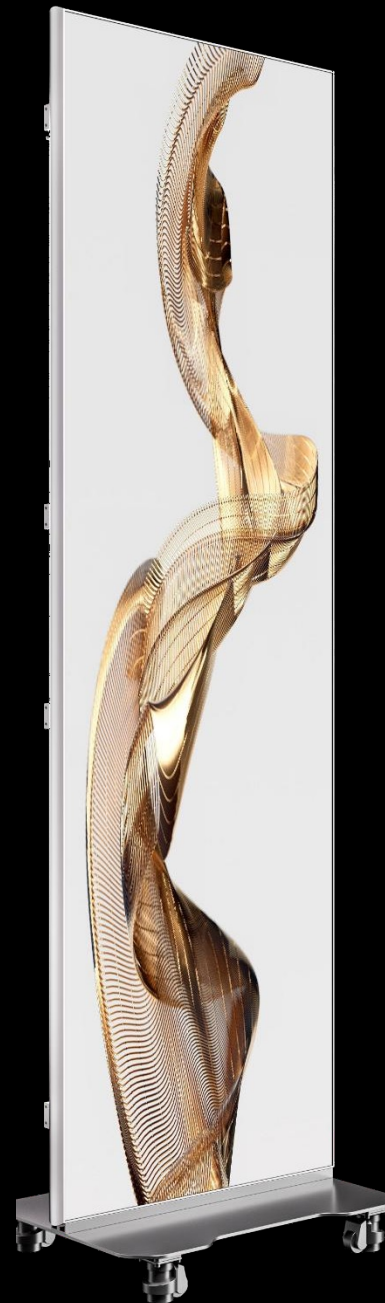



MacroPiX



Hanging installation


Suitable for cinemas, theaters,
gymnasiums, etc.

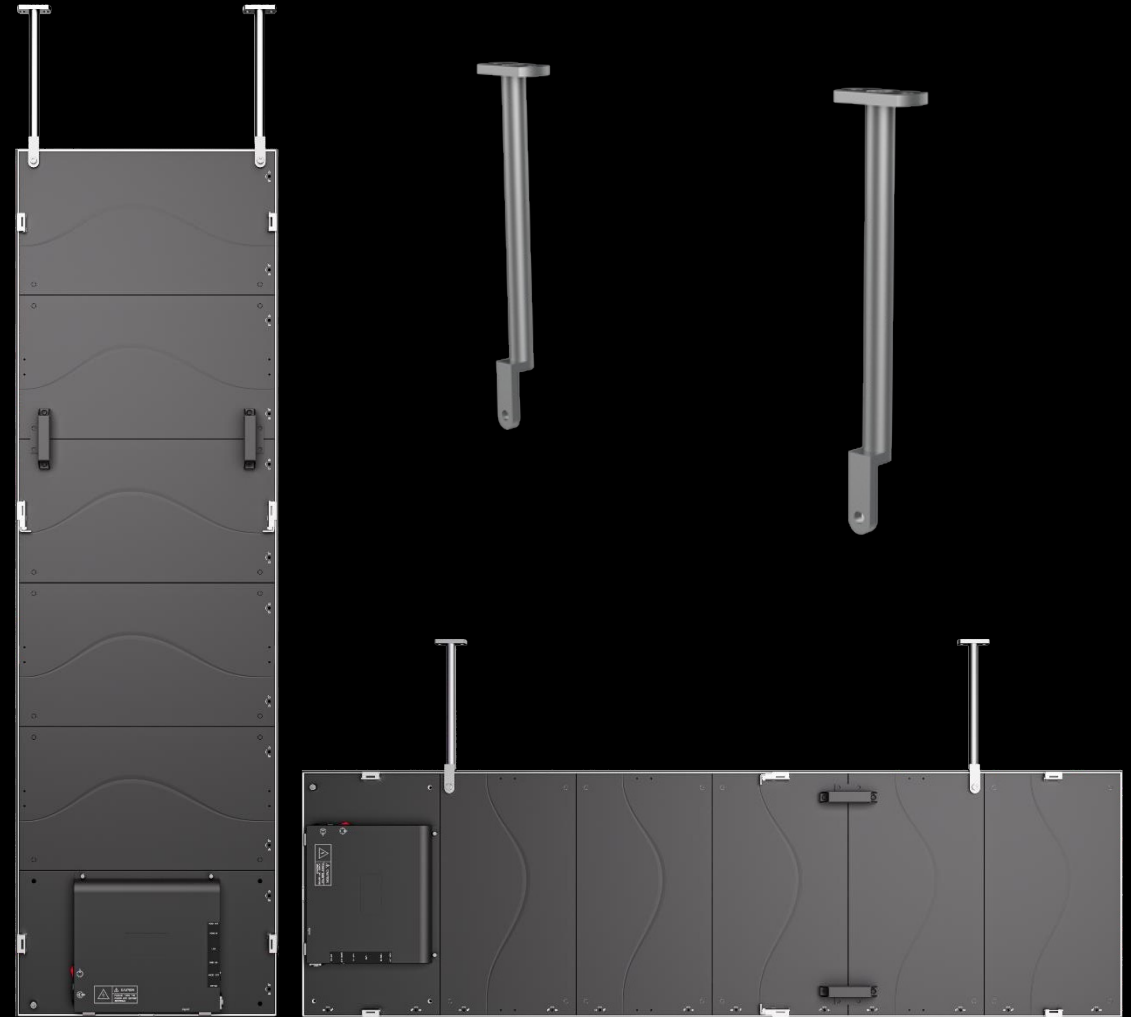



— Wall mounting


It supports wall-mounted installation, and is thin and picturesque against the wall

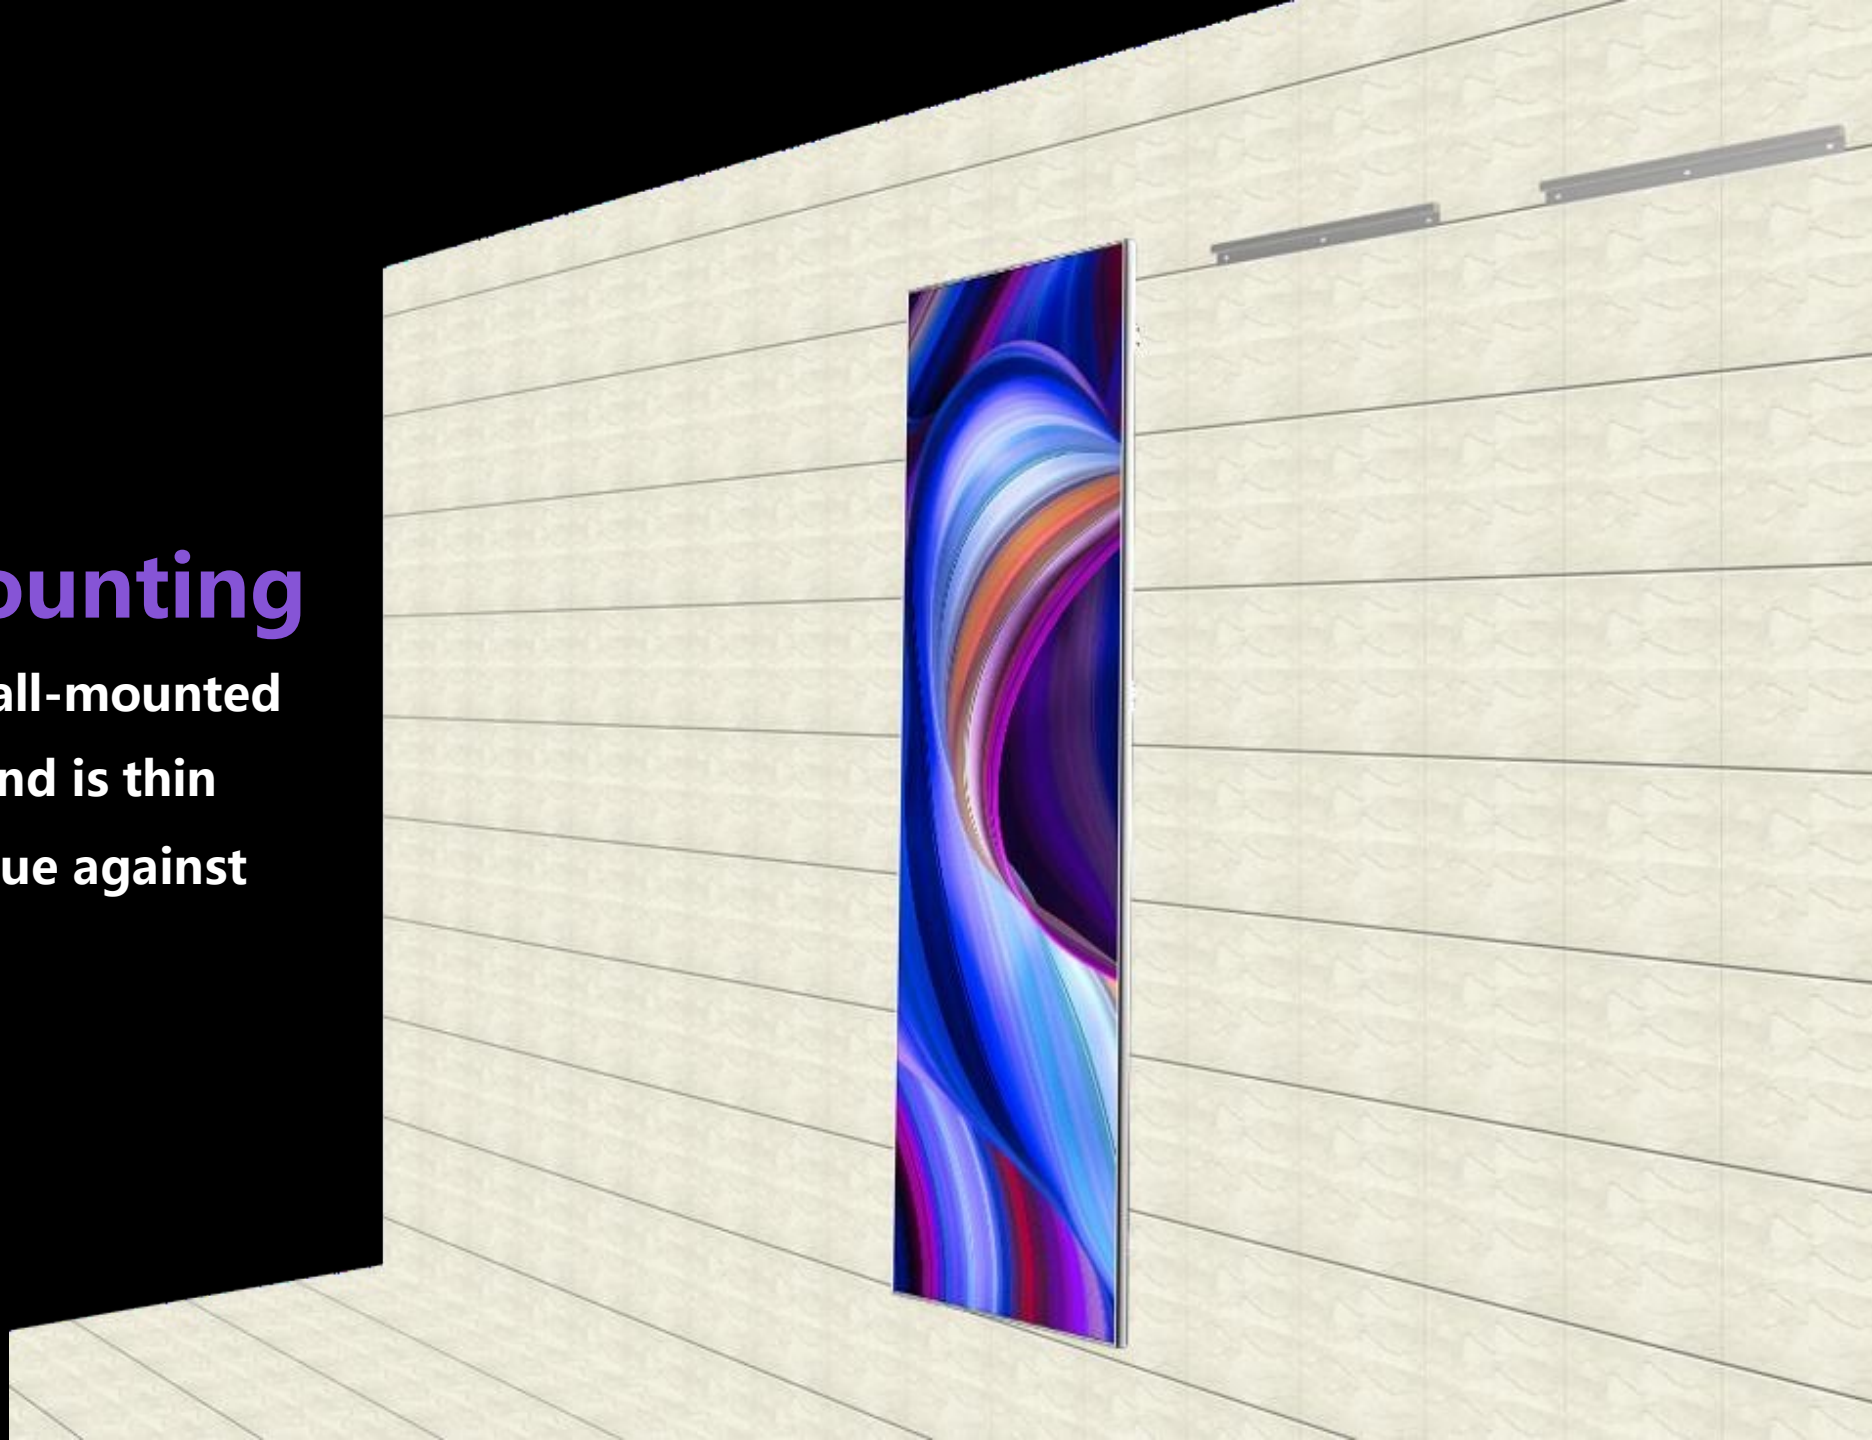



Creative stitching

By splicing multiple poster screens together, a unique display effect is formed to attract the audience's attention.

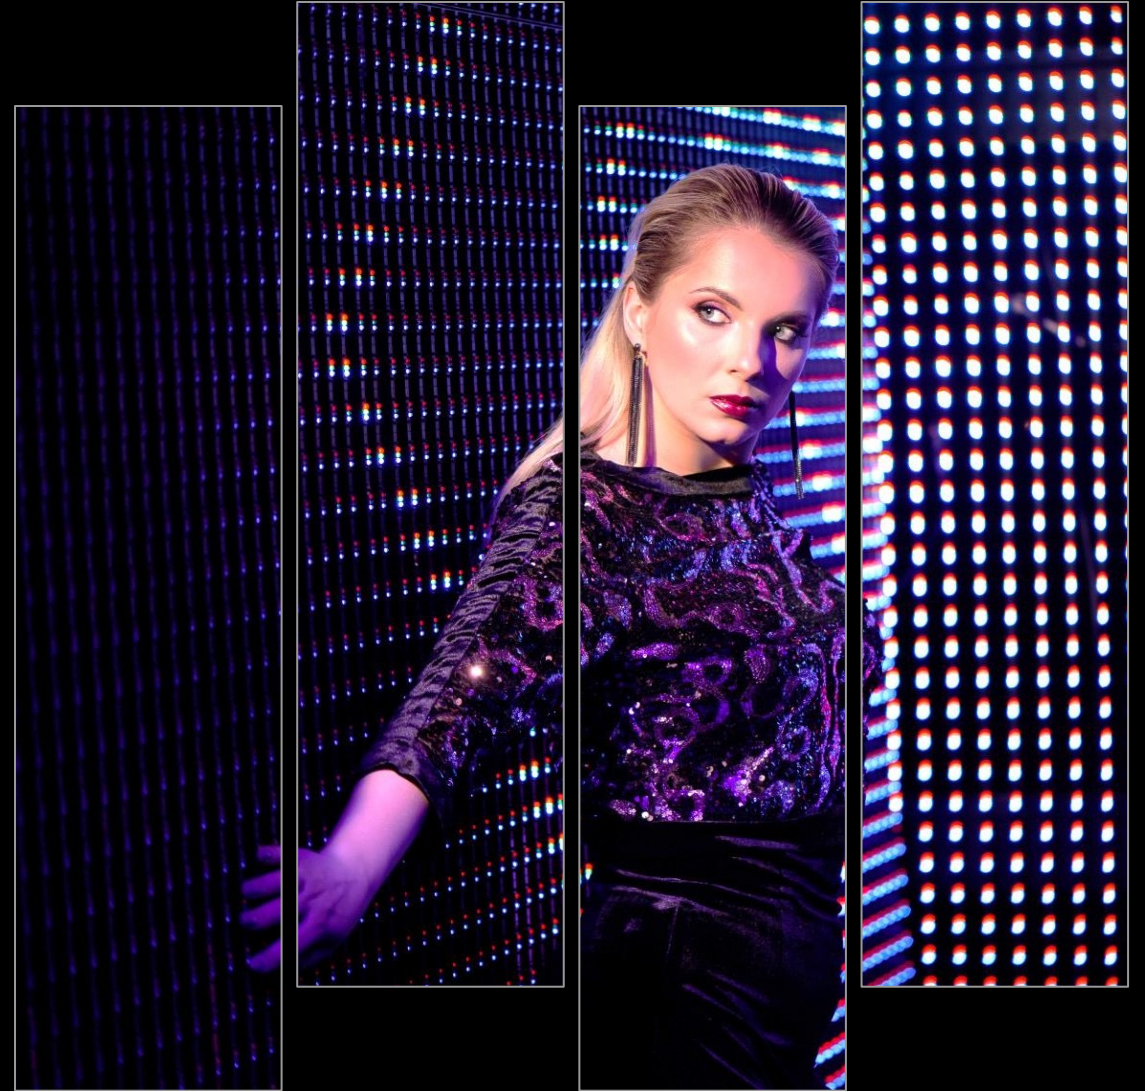

Application site - airport station

Public information

It is used to publish flight and train information to facilitate passengers' inquiries.

Advertising

It is used to play advertisements to attract the attention of travelers and improve the effectiveness of advertisements.

Wayfinding

It is used to provide navigation guidance and help travelers quickly find their destination.

Application site - shopping mall supermarket



1

Product Display

It can be used to display a variety of products and attract customers' attention.



2

Promotional Information

Promotions can be updated in real time to attract customers to come back for shopping.



3

Navigation guides

It can be used to provide navigation guidance to help customers quickly find what they are looking for.



Store display

In retail chains, it can be used to display product information, promotions, and brand stories to capture customers' attention.



MacroPiX


Standard



Power cord



HDMI

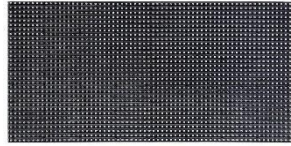

GOB LED module



Anti-static
gloves



Screwdriver



T-shaped
wrench


Matching



4G module



Hanging/wall-mounted
components



Silver suction
tool



Vacuum
suction tools



Oxford bag
packing

Specifications

Product model	Crius-C1.5P	Crius-C1.8P	Crius-C2.5P
Pixel pitch	1.5625	1.875	2.5
operating system	Android 11	Android 11	Android 11
Screen size	70 / 83 inch	70 / 83 inch	70 / 83 inch
resolution	384*1080/384*1296	320*900 / 320*1080	240*675 / 240*810
Viewable area	600mm×1687.5 mm (70inch) 600mm×2025mm (83inch)		
brightness	0-500cd/m²	0-500cd/m²	0-500cd/m²
contrast	4000:1	4000:1	4000:1
Grayscale scale	14bit	14bit	14bit
Refresh rate	3840Hz	3840Hz	3840Hz
visual angle	160°(H) / 140°(V)	160°(H) / 140°(V)	160°(H) / 140°(V)
Response time	≤0.5ms (Typ)	≤0.5ms (Typ)	≤0.5ms (Typ)
Video interface	HDMIx2 (1in1out) , USB 3.0x1	HDMIx2 (1in1out) , USB 3.0x1	HDMIx2 (1in1out) , USB 3.0x1
Audio interface	Audio x 1	Audio x 1	Audio x 1
Control interface	RJ45x1、WIFI、	RJ45x1、WIFI、	RJ45x1、WIFI、
Input voltage	100-240V~50/60Hz	100-240V~50/60Hz	100-240V~50/60Hz
power consumption	≤105W (average) / ≤350W (peak) (70inch) ≤125W (average) / ≤420W (peak) (83inch)		
The size of the whole machine	620mm*1707.5mm*39mm (70inch) 620mm*2045mm*39mm (83inch)		
weight	27kg/31kg	27kg / 31kg	
Operating temperature	0℃~40℃	0℃~40℃	0℃~40℃
Operating humidity	10%~65%RH	10%~65%RH	10%~65%RH

MacroPiX

PRICES

1.5 mm 620 x 1707 mm = 3668 Euros

1.8 mm 620 x 2045 mm = 3179 Euros

2.5 mm 620 x 2045 mm = 2641 Euros